



Features

- Aesthetically appealing design
- Sounder approved by UL to EN 54 Part 3
- Features 4 x 20 mm knockouts for surface and glanded entry

Specification

Selectable Output	High: 92-96 dB(A) /
	Low: 86-90 dB(A)
Current Consumption	14 mA at 24 V dc
Weight	0.06 kg
Operating Temperature	-5°C to +50°C
Material	Fire rated ABS
Operating Voltage	20 - 28 V dc

Description

A product designed for conventional fire alarm systems, it is an ideal solution for environments that require a discreet but affective device.

Used as an ancillary visual alarm in fire systems; LIFECO Sounder with Beacon is suitable for conventional and 2-wire fire systems as well for general alarm and signalling systems.

As with the wider LIFECO range, the product is designed to fit any recessed single gang box, giving a flush finish or surface mounted using the default surface box.

Body colours available are Red and White. Strobe colours available are Red, Clear, Amber, Blue and Green.



Flush Mounted



Surface Mounted



Flush Mounted

Part Code	Part Name
LF-1110RFA	Flush Mount, Red, Amber
LF-1110RFB	Flush Mount, Red, Blue
LF-1110RFG	Flush Mount, Red, Green
LF-1110RFR	Flush Mount, Red, Red
LF-1110RFW	Flush Mount, Red, White
LF-1110WFA	Flush Mount, White, Amber
LF-1110WFB	Flush Mount, White, Blue
LF-1110WFG	Flush Mount, White, Green
LF-1110WFR	Flush Mount, White, Red
LF-1110WFW	Flush Mount, White, White


Surface Mounted

Part Code	Part Name
LF-1110RSA	Surface Mount, Red, Amber
LF-1110RSB	Surface Mount, Red, Blue
LF-1110RSG	Surface Mount, Red, Green
LF-1110RSR	Surface Mount, Red, Red
LF-1110RSW	Surface Mount, Red, White
LF-1110WSA	Surface Mount, White, Amber
LF-1110WSB	Surface Mount, White, Blue
LF-1110WSG	Surface Mount, White, Green
LF-1110WSR	Surface Mount, White, Red
LF-1110WSW	Surface Mount, White, White




Sounder with Beacon Model No: LF-1110XXX


Technical Drawing

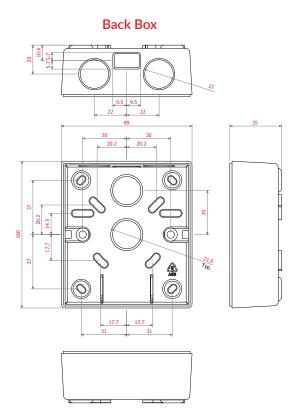

Sounder Unit

Dimensions: mm





Specifications subject to change without notice (REV.01 - 2021)